ORION ® | OIC ® ORION IMAGES CORPORATION

SPECIALIZING IN LCD / LED MONITORS

LED

BASIC LED MONITOR SERIES

1080p	LED	250 cd/m²	1000:1	5ms	(tilt stand icon)
RESOLUTION	BACK LIGNT	BRIGHTNESS	CONTRAST	RESPONSE TIME	TILT STAND

21REDB

BUILT TO RUN 24 X 7 X 365 CONTINUOUSLY

OVERVIEW

The ORION LCD w/ LED BLU (backlight unit) high brightness displays are a truly professional experience in next generation technology using eco-friendly material (no mercury or halogen). This technology exceeds the NTSC color gamut standard of 100% with the LED BLU at 123% to provide a wider range of colours than ever before - you will see colors on screen as you see them in real world.

FEATURES

- 1920 x 1080p Full HD Display Resolution
- DVI-D 1 In / VGA 1 In, PC Stereo 1 In
- LED BLU (Back Light Unit) Display Monitor
- 5ms Response, 250 NITS, 1000:1 Contrast Ratio,
- Auto Color Balance Function
- Mount Options: Wall, Ceiling or Rack

Industrial

Interface

Easy Access

DOWN UP MENU SEL POWER

24 7 365
Built to run 24 x 7 x 365
Continuously

21REDB

SPECIFICATIONS

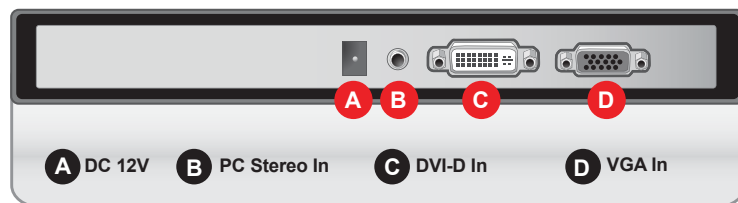| 21REDB	
Display	
Screen Size	21.5 Inch
Max. Resolution	1920 x 1080 @ 60Hz
Pixel Pitch	0.248 x 0.248mm
Brightness	250cd/m²
Contrast Ratio	1000 : 1
Aspect Ratio	16 : 9
Viewing Angle (H/V)	170° / 160°
Display Color	16.7 Million
Response Time	< 5ms
Video System	NTSC / PAL
Interface	
Video In / Out (BNC Type)	0 In
DVI-D In	1 In
S-Video In / Out	0 In
VGA In (15Pin D-Sub)	1 In
Audio In (RCA Type)	0 In
PC Stereo In	1 In
Transmitter	
Remote Control	N/A
Audio	
Built-in Speakers	Yes (1W x 2)
Features	
Filter Type	2D Comb Filter
LCD Protection Glass	N/A
Multi Language	English
General	
Outline Dimension (W x H x D)	21.18" x 15.94" x 5.91"
Net Weight	3.99Kg (8.81 lbs)
Material / Color	ABS Plastic / Black
Desk Top Stand	Tilt Back
Part / Labor	3year / 3year
Consumption: < On	< 30W
	AC100 ~ 240V(50/60Hz)
Electrical Ratings	DC12V / 3.5A
Operating Temperature	0° ~ 40° C / 32° ~ 104° F
Storage Temperature	-20° ~ 60° C / -4° ~ 140° F
Mounts	
VESA™ Mount Size	75 x 75mm
Wall	WB-5, WB-10, WB-30, WB-31
Ceiling	CMK-01

*Design and specifications are subject to change without notice

INPUT INTERFACE
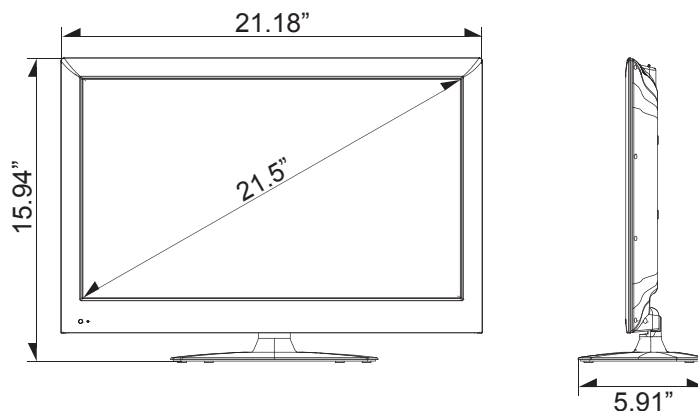

A DC 12V **B** PC Stereo In **C** DVI-D In **D** VGA In

DIMENSIONS

21.18"
15.94"
21.5"
5.91"

TILT CAPABILITY

5°

REDB series has flexible tiltable desktop stand capability

OPTIONAL MOUNTS

WALL
WB-5 WB-10 WB-30 WB-31

RACK
RMK-08

CEILING
CMK-01

ORION | OIC ORION IMAGES CORPORATION

GSA